



Subscribe to Caron Connections, our free eNewsletter

Enter your e-mail address

subscribe

The Yarn. The Web. The Experience.

Home

Yarns

Pattern Boutique

Gallery

Guide to Style

Cari's Blog

Where to Buy

Edinborough Pullover Vest

designed by
Kim Kotary



Technique used: Knit



Naturally Caron.com Country

(75% micro denier acrylic, 25% merino wool; 3

oz/100 g, 185 yds/170 m ball):

12 (12, 15, 15, 18) oz

Shown in: #0007 Naturally

One pair size US 10.5 (6.5 mm) knitting needles or
size to obtain gauge

One circular size US 10.5 (6.5 mm), 24"/61 cm long

Cable needle

Stitch markers

Yarn Needle

Row counter



Click for audio fashion show



click images to enlarge

schematic



Printer Friendly instructions

SIZES

Small (Medium, Large, X-Large, 2X-Large, 3X-Large)

KNITTED MEASUREMENTS

Bust 36 (40, 44, 48, 52, 56)"/91.5 (101.5, 111.5, 122, 132, 142) cm

Length 22 (22, 22 1/2, 22 1/2, 23, 23)"/56 (56, 57, 57, 58.5, 58.5) cm

GAUGE

In Stockinette stitch, 16 sts and 20 rows = 4"/10 cm,

STITCHES USED

Reverse Stockinette st (Rev St st): Purl on RS, knit on WS.

Stockinette stitch (St st): Knit on RS, purl on WS.

Knit every round.

3 x 3 rib - straight (multiple of 6 sts + 2); circular (multiple of 6 sts)

Row/Round 1 (RS): P2, * k3, p3; repeat from * across/around; if working circular, end last repeat p1 instead of p3.

Row/Round 2: Knit the knit sts and purl the purl sts as they face you.

Repeat Row/Round 2 for 3 x 3 rib.

6-stitch Back Cable (C6B): Slip 3 sts to cable needle, hold to back, k3, k3 from cable needle.

6-stitch Front Cable (C6F): Slip 3 sts to cable needle, hold to front, k3, k3 from cable needle.

Twist-4 Back Cable (T4B): Slip 1 st to cable needle, hold to back, k3, p1 from cable needle.

Twist-4 Front Cable (T4F): Slip 3 sts to cable needle, hold to front, p1, k3 from cable needle.

Cable Panel (22 sts—see chart)

Row 1 (RS): P1, k3, p2, k3, p4, k3, p2, k3, p1

Row 2 and all WS rows: Knit the knit sts and purl the purl sts as they face you.

Row 3: P1, T4F, T4B, p4, T4F, T4B, p1.

Row 5: P2, C6F, p6 C6F, p2.

Row 7: P1, T4B, T4F, p4, T4B, T4F, p1.

Row 9: T4B, p2, T4F, p2, T4B, p2, T4F.

Row 11: K3 p4, T4F, T4B, p4, k3.

Row 13: K3, p5, C6B, p5, k3.

Row 15: K3, p4, T4B, T4F, p4, k3.

Row 17: T4F, p2, T4B, p2, T4F, p2, T4B.

Row 18: Repeat Row 2.

Repeat Rows 3—18 for Cable panel.

NOTES

Cabled Yokes are worked from side to side.

Body of the Vest is worked down from Cabled Yoke.

Ribbed Collar is worked last.

BACK

Cast on 50 sts for all sizes.

Yoke

Establish Pattern: (RS) Beginning at shoulder edge, p20 (keep in Rev St st), place marker (pm); work Row 1 of Cable panel across 22 sts, pm; p3 (keep in Rev St st), k2 (keep in St st), p3 (keep in Rev St st).

Work even as established until piece measures 18 (20, 22, 24, 26, 28)", end with a RS row.

Bind off all sts loosely in patt.

Body

With RS facing, working along lower edge of Yoke, pick-up and knit 72 (80, 88, 96, 104, 112) sts evenly across. (WS)

Begin St st; work even until piece measures 10 (10, 10 1/2, 10 1/2, 11, 11)" or 3" less than desired length, inc 2 (0, 0, 2, 0, 0) sts evenly or dec 0 (0, 2, 0, 0, 2) sts evenly across last (WS) row—74 (80, 86, 98, 104, 110) sts.

Ribbing

Change to 3 x 3 rib; work even for 3".

Bind off all sts loosely in rib.

FRONT

Left Shoulder of Yoke

Work as for Back until piece measures 6 (7, 7 1/2, 8 1/2, 9, 10)" from beginning, end with a WS row.

Shape Neck

(RS) Continuing in established patt, bind off 4 sts, work to end—46 sts remain.

Work 1 row even.

(RS) At neck edge (beginning of RS rows), bind off 2 sts every other row 6 times, end with a RS row—34 sts remain; pm for end of left Neck Shaping.

Keeping track of the number of rows worked after marker, work even until piece measures 9 (10, 11, 12, 13, 14)" from beginning, end with RS row; pm for center of Neck Shaping.

Work even for same number of rows as worked between last two markers, end with RS row; pm for end of even rows on neck edge, end with a RS row.

(WS) For right Neck Shaping, beginning this row, cast on 2 sts at neck edge every other row 6 times, end with a RS row—46 sts.

(WS) Work in patt across; at neck edge, cast on 4 sts; pm for end of right Neck Shaping—50 sts.

Right Shoulder of Yoke

(RS) Work even until piece measures 18 (20, 22, 24, 26, 28)" from the beginning—6 (7, 7 1/2, 8 1/2, 9, 10)" from end of right neck shaping.

Bind off as for Back Yoke.

Body and Ribbing

Work as for Back.

FINISHING

Block pieces to measurements, if necessary being careful not to flatten Cables. Sew shoulder seams. Sew side seams from lower edge to pick-up row for Body, or desired length for armhole opening.


Collar


With RS facing, using circular needle, pick up and knit 90 (90, 102, 102, 114, 114) sts around neck shaping; join, pm for beg of round.

Begin 3 x 3 rib; work even until piece measures 8" from pick up round.

Bind off all sts loosely in rib pattern.

Using yarn needle, weave in ends.

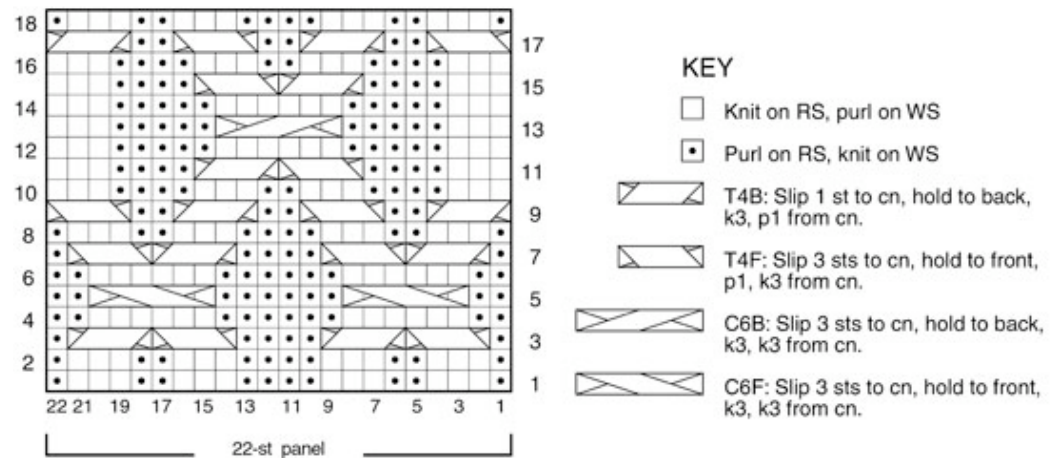

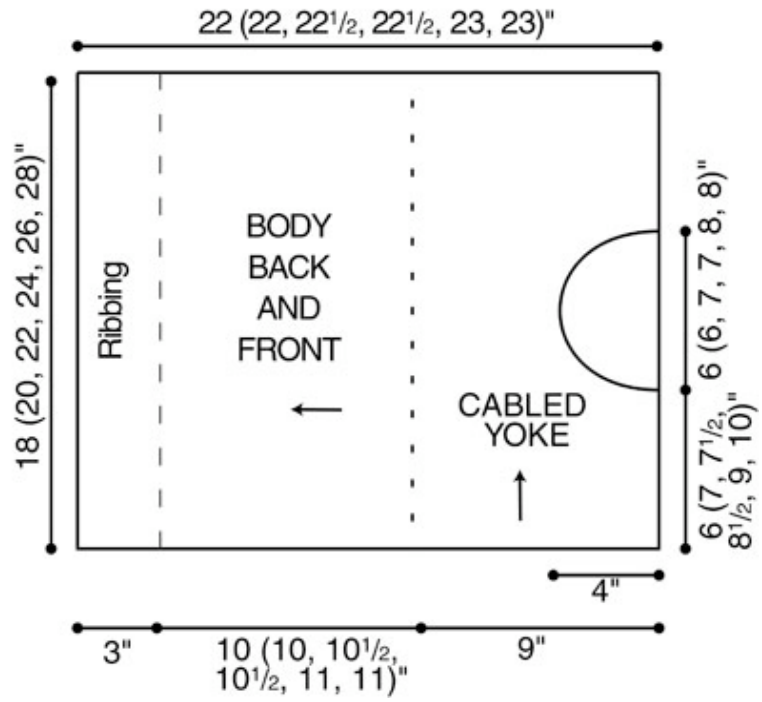

[Visit Bond America online](#)

[Visit Caron International online](#)

CARON
©2008 Caron International